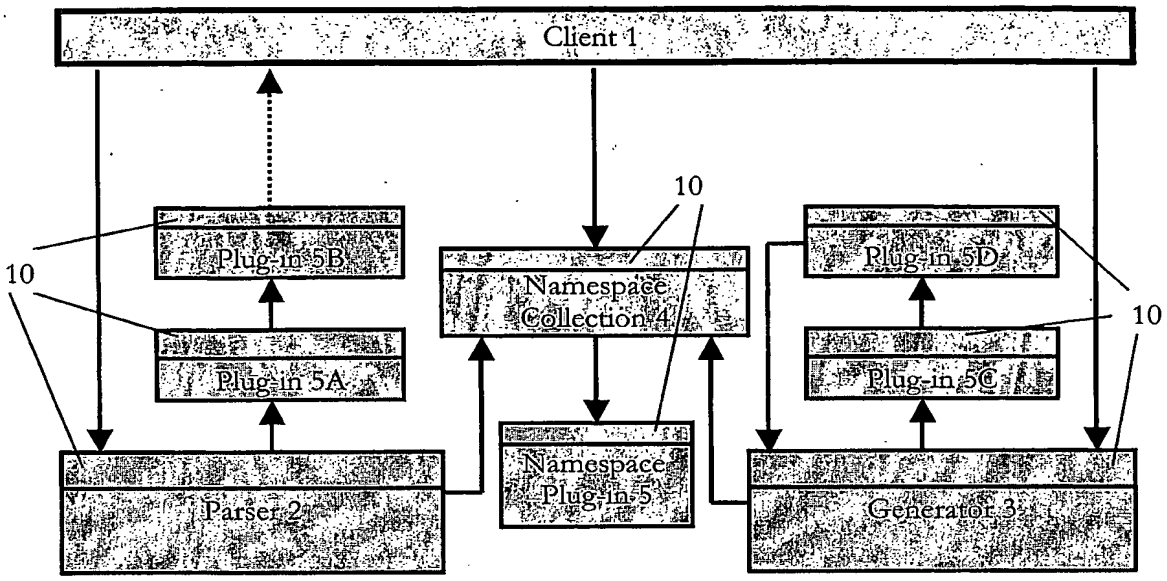

Figure 1

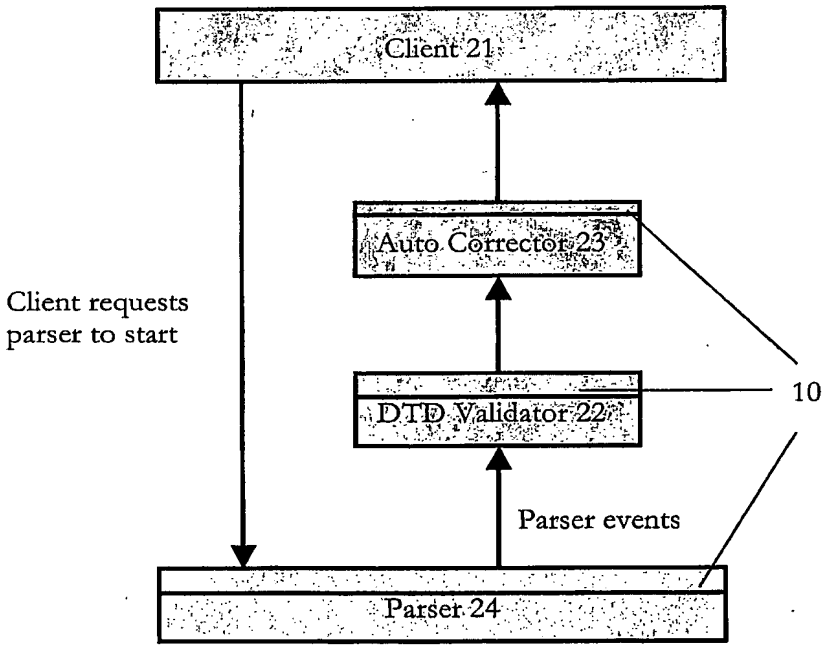

Figure 2

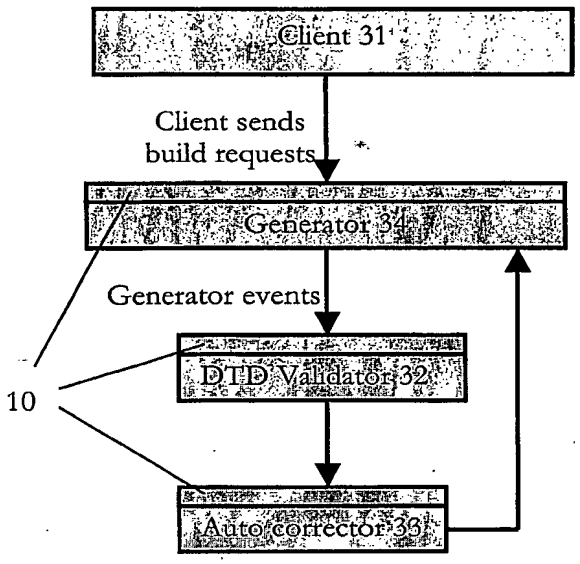
Client 31
Client sends build requests
Generator 34
Generator events
DTD Validator 32
10
Auto corrector 33

Figure 3

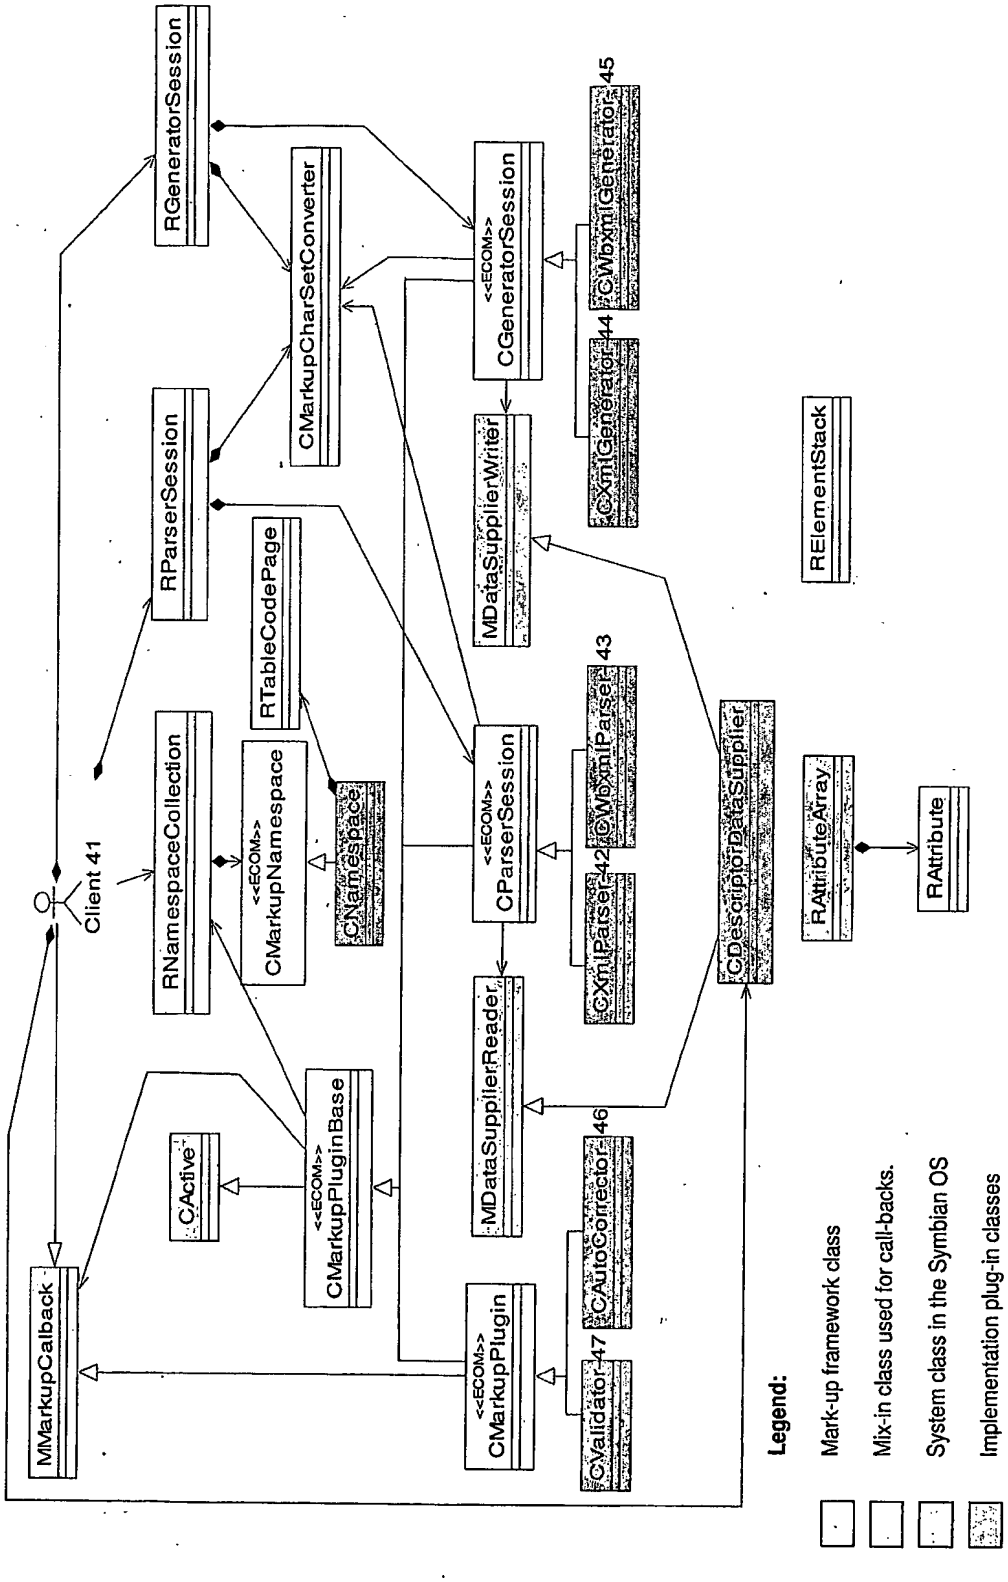
RGeneratorSession
RParserSession
CMarkupCharSetConverter
<<ECOM>>
CGeneratorSession
CWbxmlGenerator
45
CXmlGenerator
44
MDataSupplierWriter
RElementStack
RTableCodePage
RNamespaceCollection
<<ECOM>>
CMarkupNamespace
CNamespace
Client 41
<<ECOM>>
CParserSession
CWbxmlParser
43
CXmlParser
42
CDescriptorDataSupplier
RAttributeArray
RAttribute
CActive
<<ECOM>>
CMarkupPluginBase
MDataSupplierReader
MMarkupCallback
<<ECOM>>
CMarkupPlugin
CAutoCorrector
46
CValidator
47
Legend:
Mark-up framework class
Mix-in class used for call-backs.
System class in the Symbian OS
Implementation plug-in classes

Figure 4

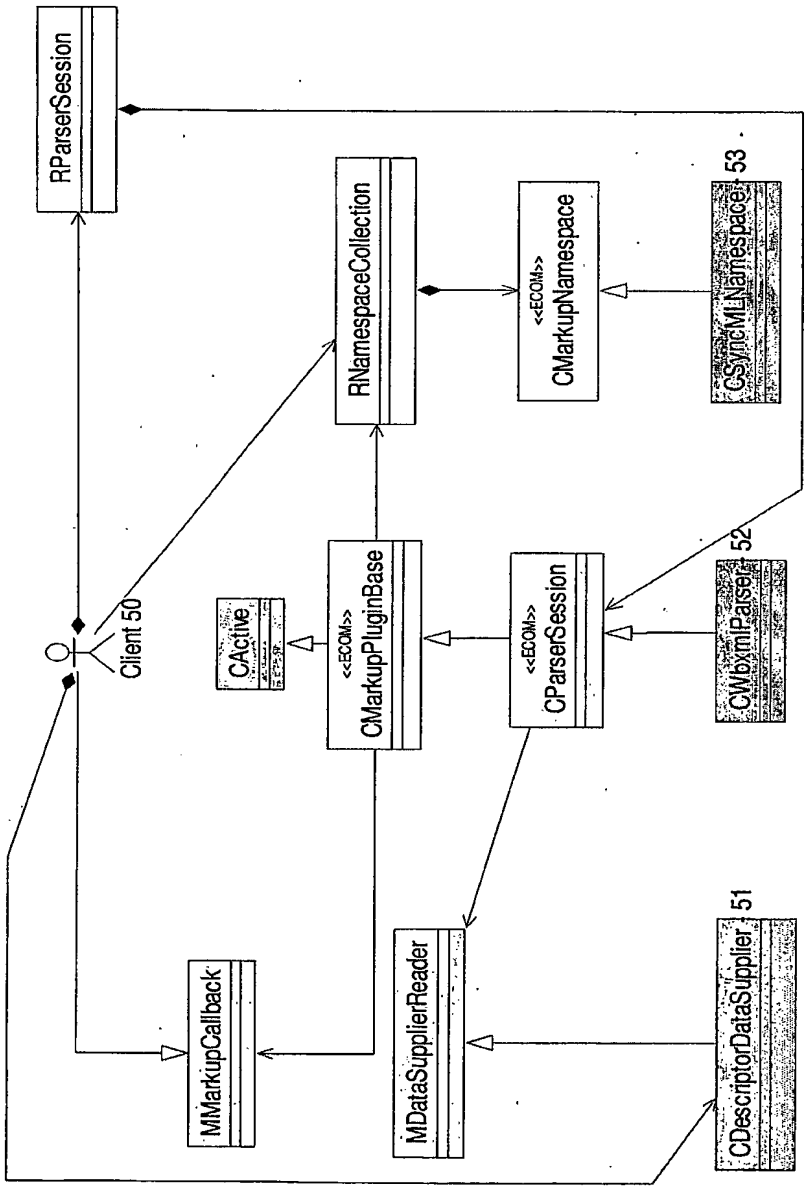
RParserSession
RNamespaceCollection
<<ECOM>>
CMarkupNamespace
CSymbianMLNamespace
53
Client 50
CActive
<<ECOM>>
CMarkupPluginBase
<<ECOM>>
CParserSession
CWbxmlParser
52
MMarkupCallback
MDataSupplierReader
CDescriptorDataSupplier
51

Figure 5

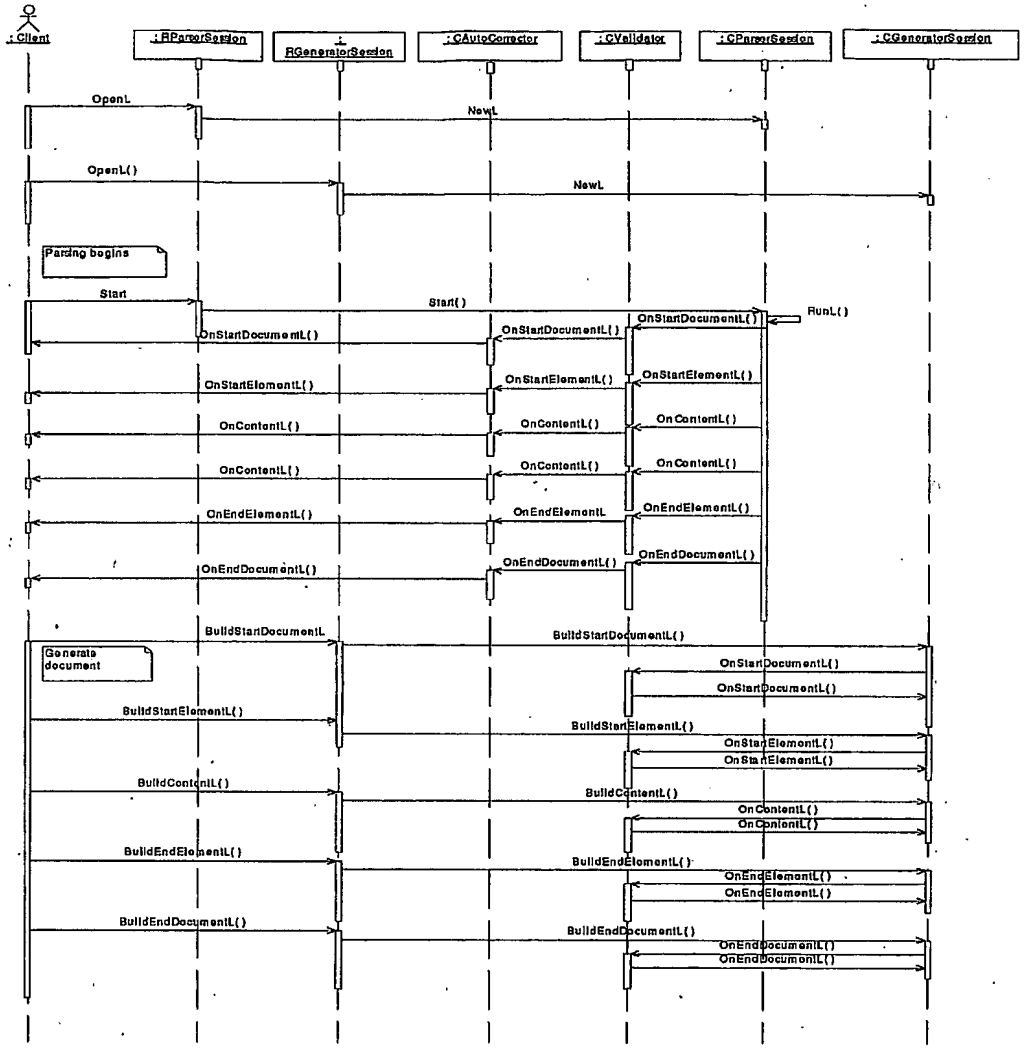
:Client
:RParserSession
:RGeneratorSession
:CAutoCorrector
:CValidator
:CParserSession
:CGeneratorSession
OpenL
NewL
OpenL()
NewL
Parsing begins
Start
Start()
RunL()
OnStartDocumentL()
OnStartElementL()
OnContentL()
OnEndElementL()
OnEndDocumentL()
BuildStartDocumentL
BuildStartDocumentL()
Generate document
BuildStartElementL()
BuildContentL()
BuildEndElementL()
BuildEndDocumentL()

FIGURE 6

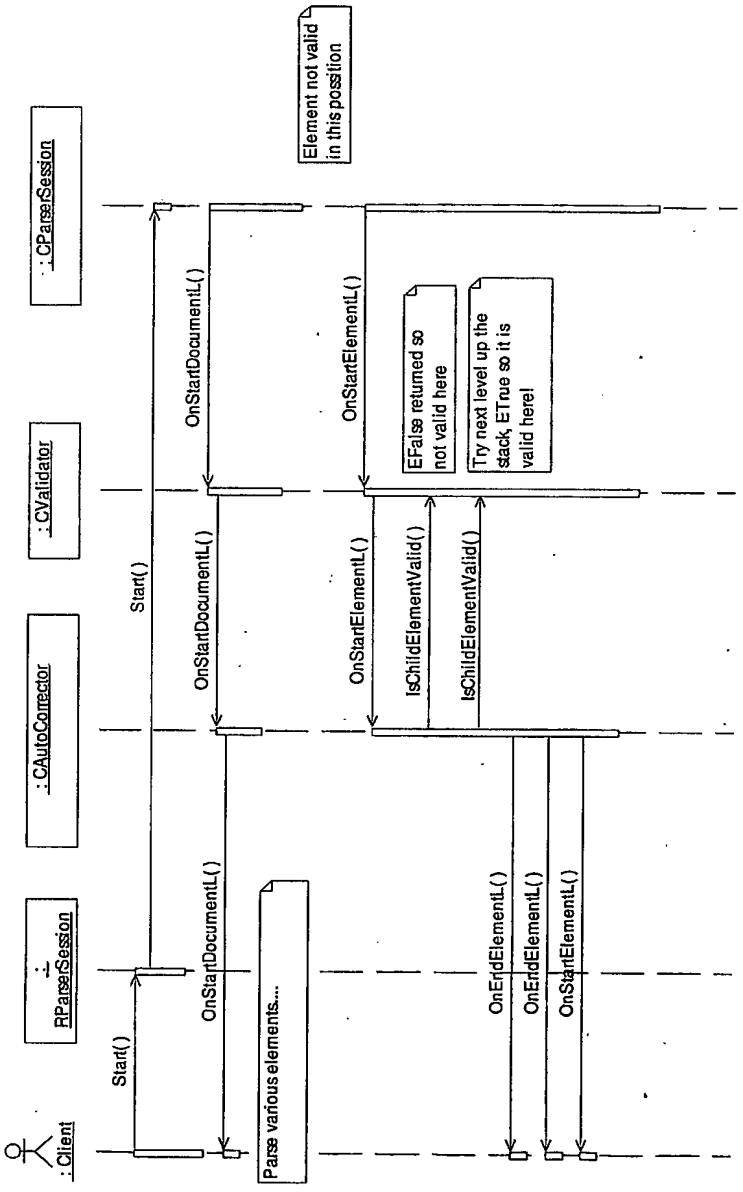
: Client
RParserSession
: CAutoCorrector
: CValidator
: CParserSession
Start()
Start()
OnStartDocumentL()
OnStartDocumentL()
OnStartDocumentL()
Parse various elements...
OnStartElementL()
OnStartElementL()
IsChildElementValid()
IsChildElementValid()
Element not valid in this position
EFalse returned so not valid here
Try next level up the stack, ETrue so it is valid here!
OnEndElementL()
OnEndElementL()
OnStartElementL()

Figure 7

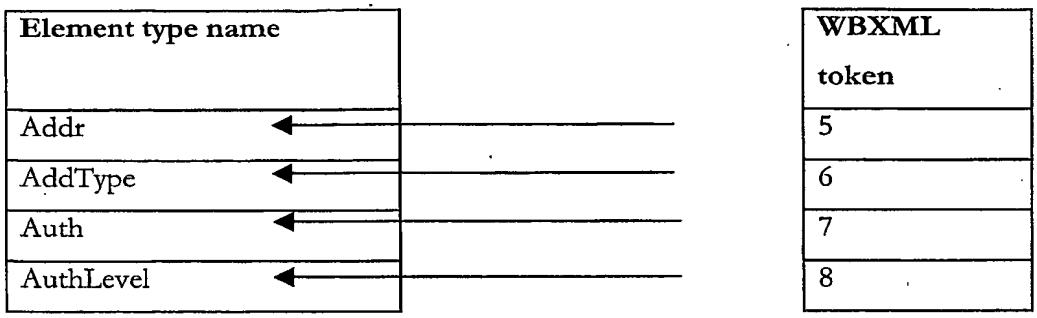
Element type name
Addr
AddType
Auth
AuthLevel
WBXML token
5
6
7
8

Figure 8

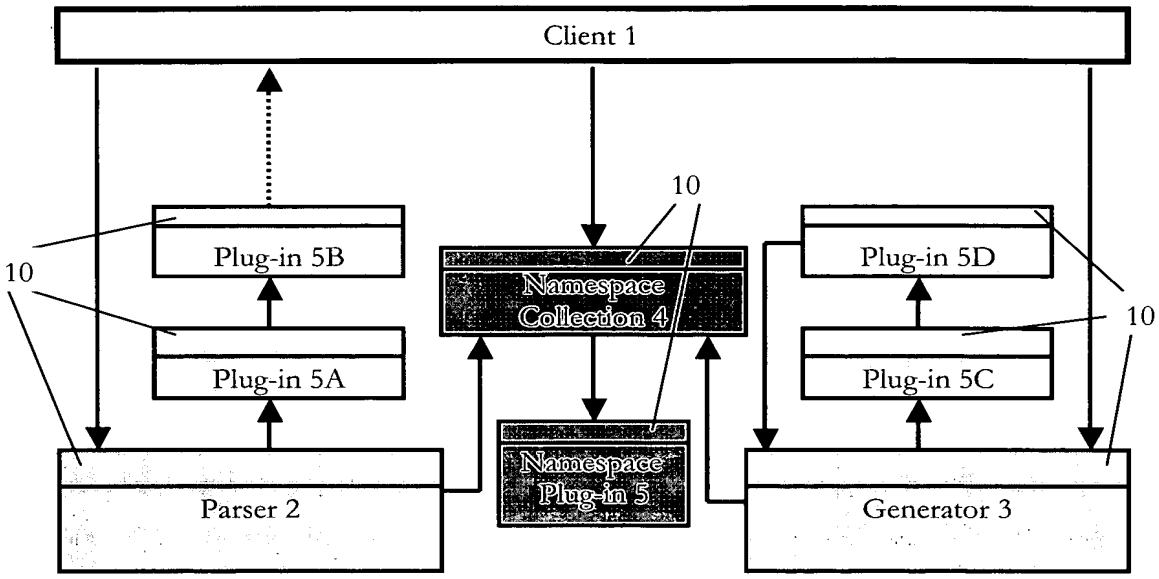

Figure 1

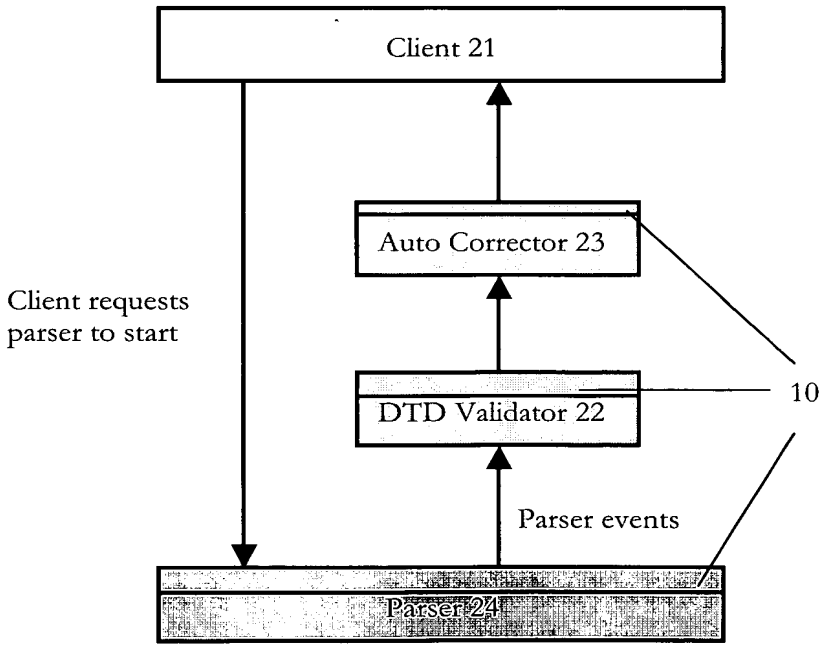

Figure 2

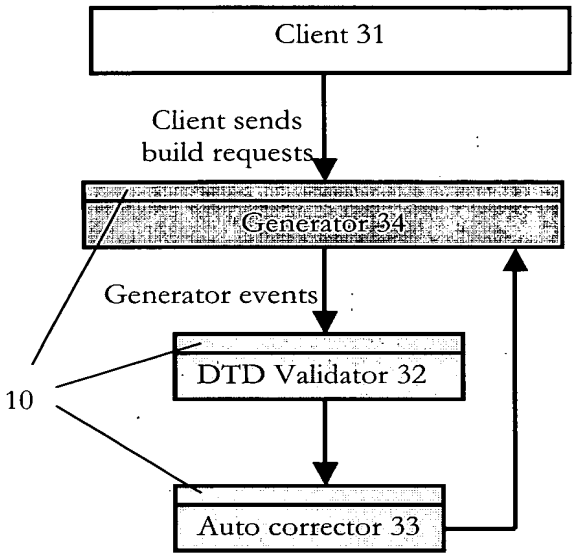
Client 31
Client sends build requests
Generator 34
Generator events
DTD Validator 32
10
Auto corrector 33

Figure 3

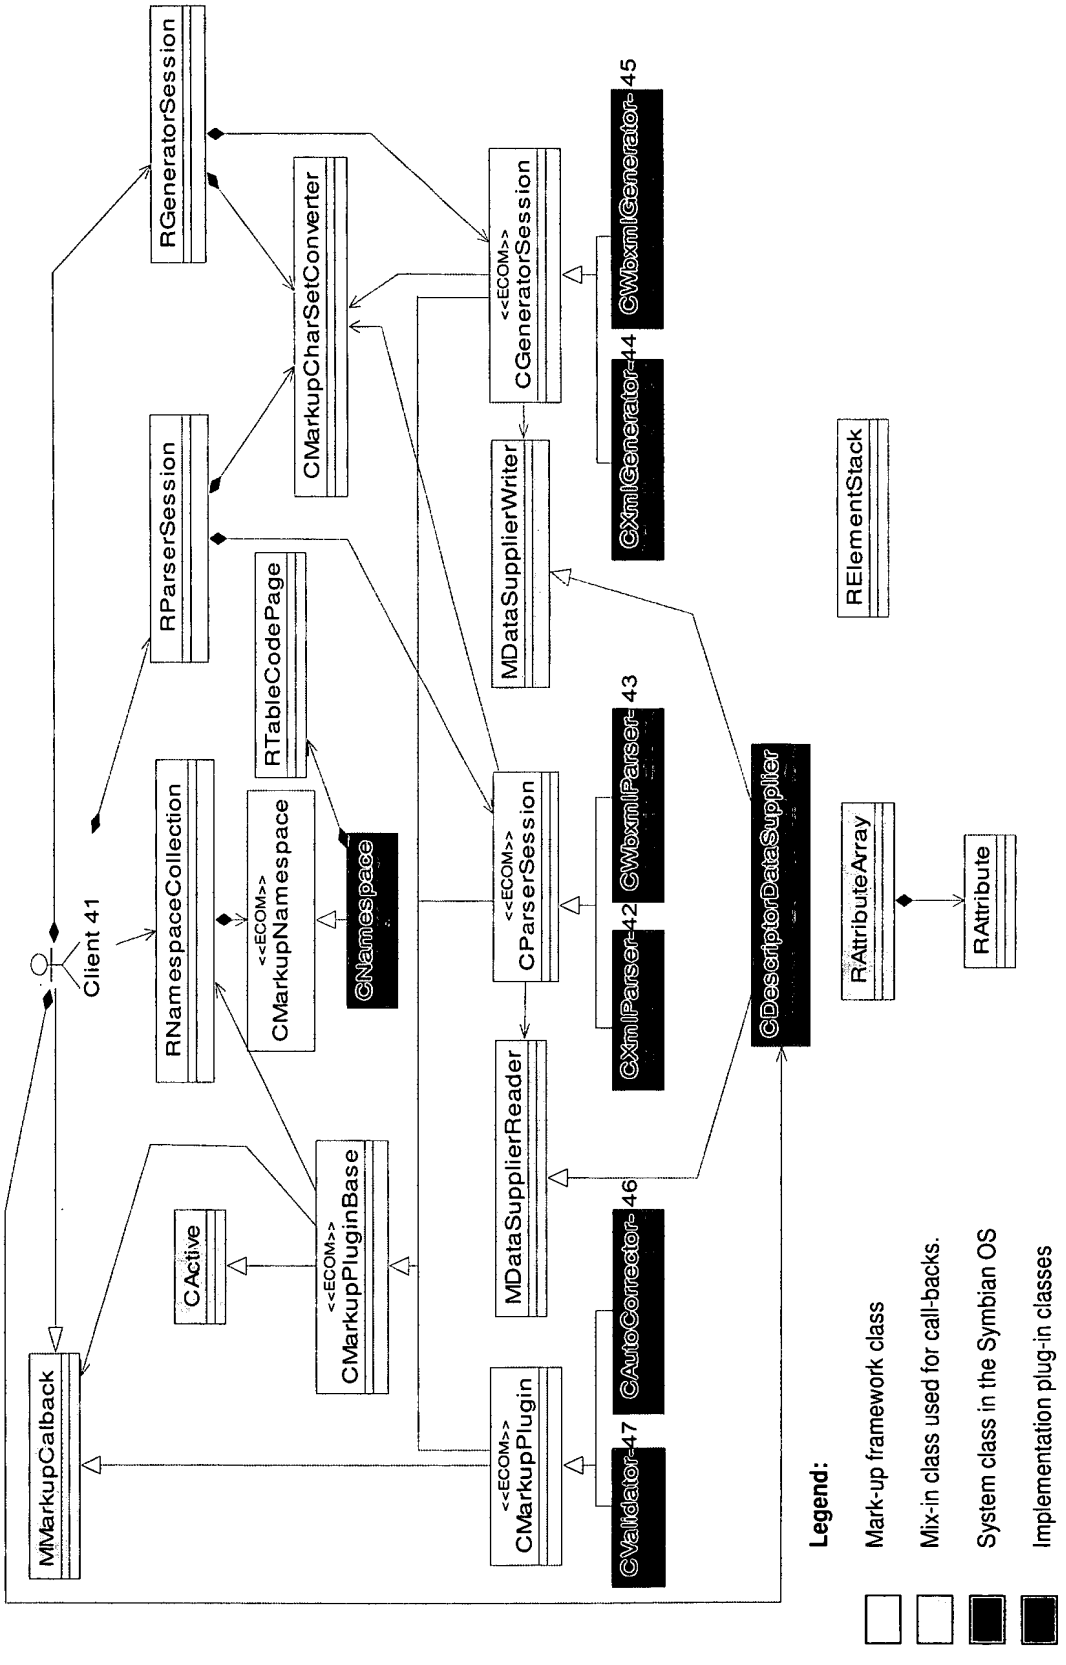
RGeneratorSession
CMarkupCharSetConverter
<<ECOM>>
CGeneratorSession
CWbxmlGenerator-45
CXmlGenerator-44
RParserSession
MDataSupplierWriter
RTableCodePage
RElementStack
RNamespaceCollection
<<ECOM>>
CMarkupNamespace
CNamespace
<<ECOM>>
CParserSession
CWbxmlParser-43
CXmlParser-42
Client 41
CDescriptorDataSupplier
RAttributeArray
RAttribute
CActive
<<ECOM>>
CMarkupPluginBase
MDataSupplierReader
CAutoCorrector-46
MMarkupCallback
<<ECOM>>
CMarkupPlugin
CValidator-47
Legend:
Mark-up framework class
Mix-in class used for call-backs.
System class in the Symbian OS
Implementation plug-in classes

Figure 4

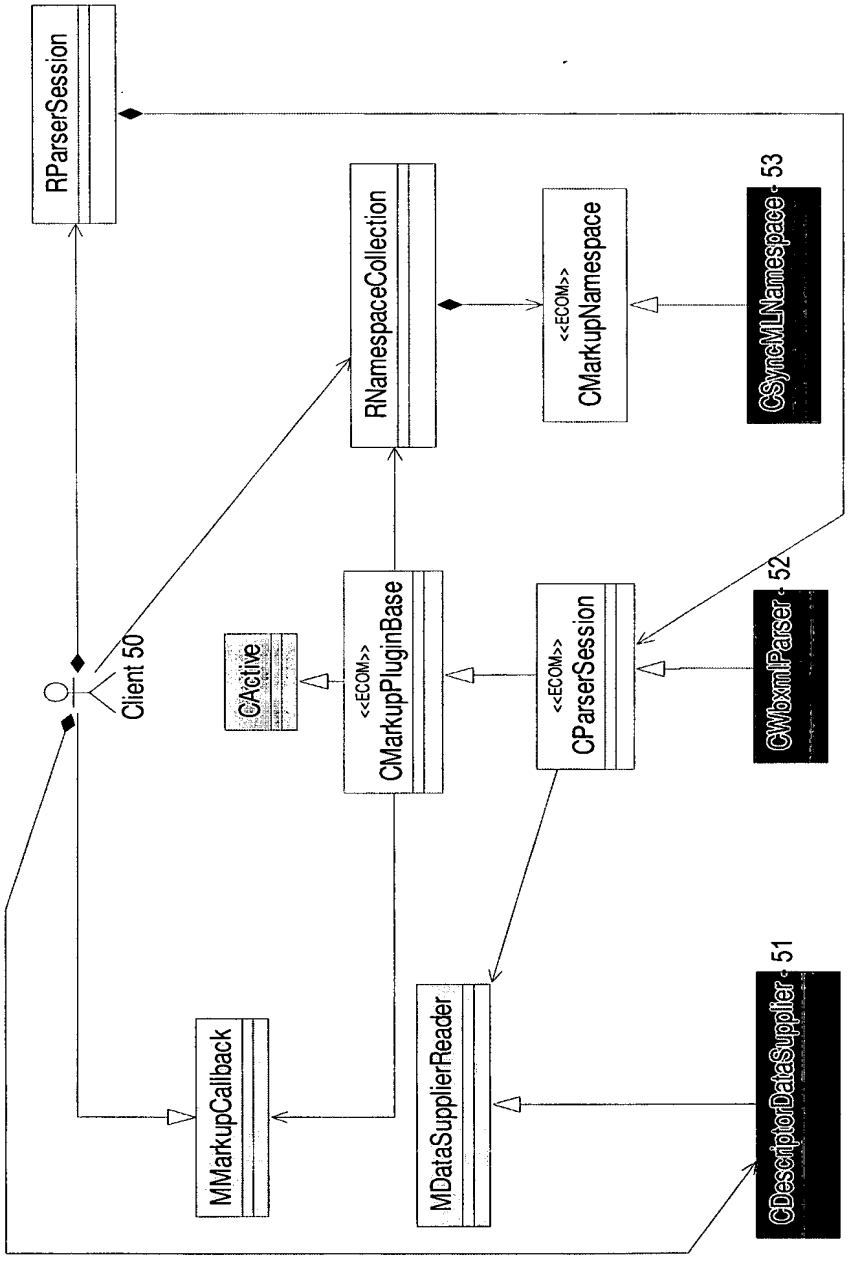
RParserSession
Client 50
RNamespaceCollection
<<ECOM>>
CMarkupNamespace
CSyncMLNamespace
53
CActive
<<ECOM>>
CMarkupPluginBase
<<ECOM>>
CParserSession
CWbxmlParser
52
MMarkupCallback
MDataSupplierReader
CDescriptorDataSupplier
51

Figure 5

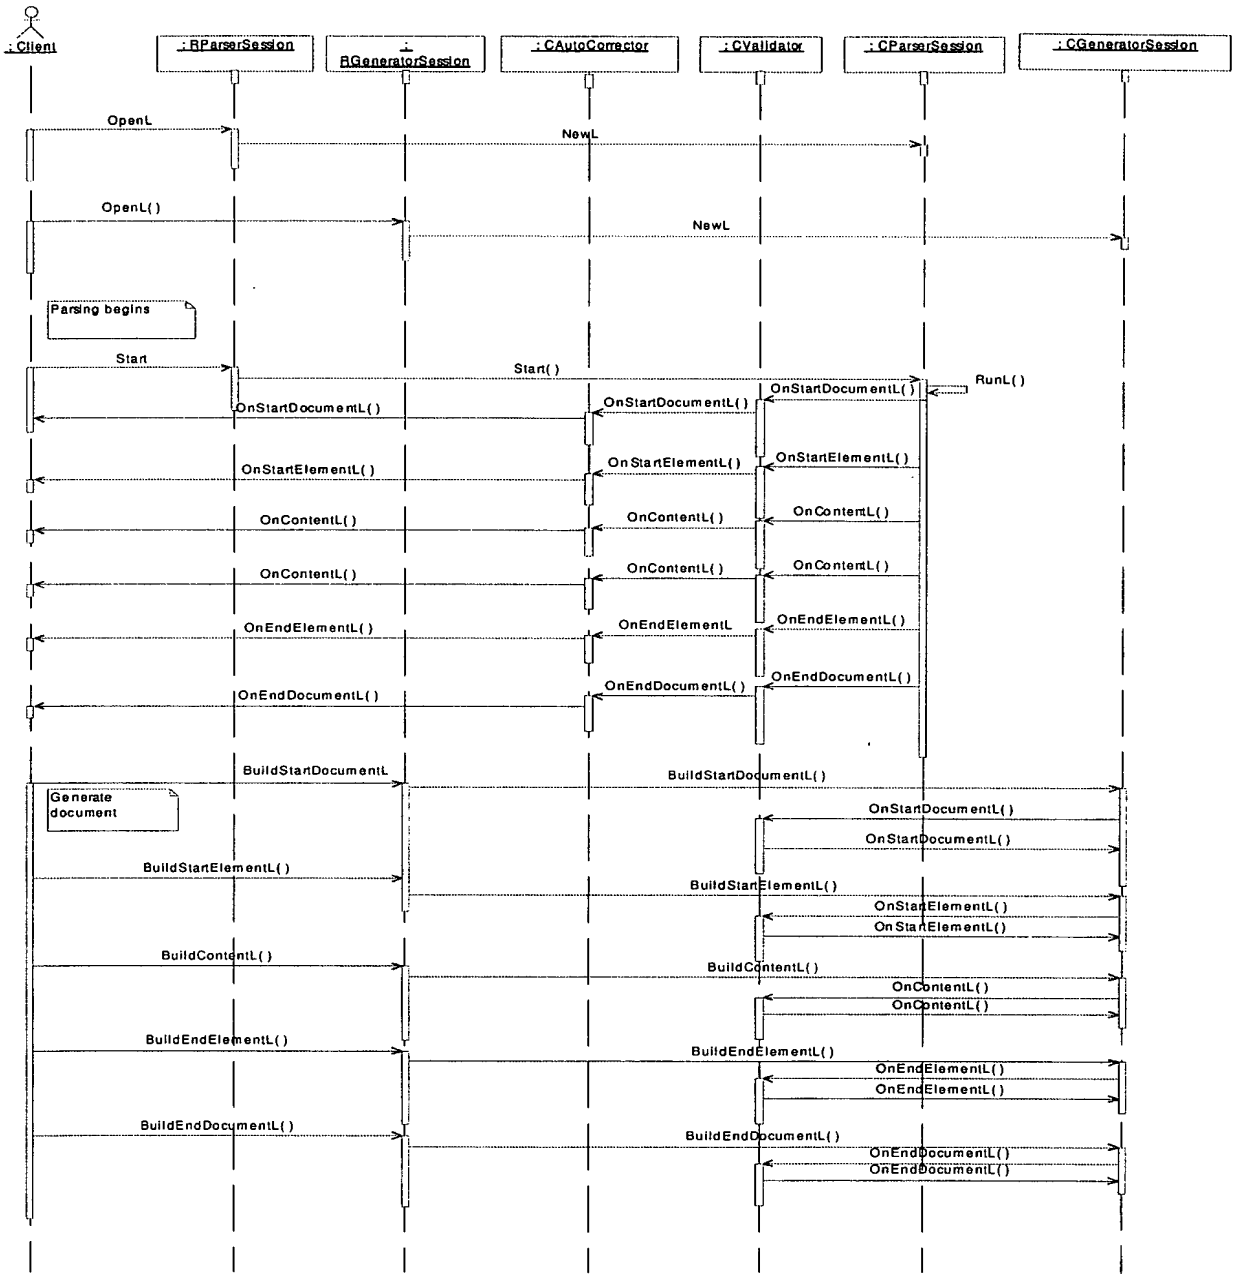
:Client
:RParserSession
:RGeneratorSession
:CAutoCorrector
:CValidator
:CParserSession
:CGeneratorSession
OpenL
NewL
OpenL()
NewL
Parsing begins
Start
Start()
RunL()
OnStartDocumentL()
OnStartElementL()
OnContentL()
OnEndElementL()
OnEndDocumentL()
BuildStartDocumentL
BuildStartDocumentL()
Generate document
BuildStartElementL()
BuildContentL()
BuildEndElementL()
BuildEndDocumentL()

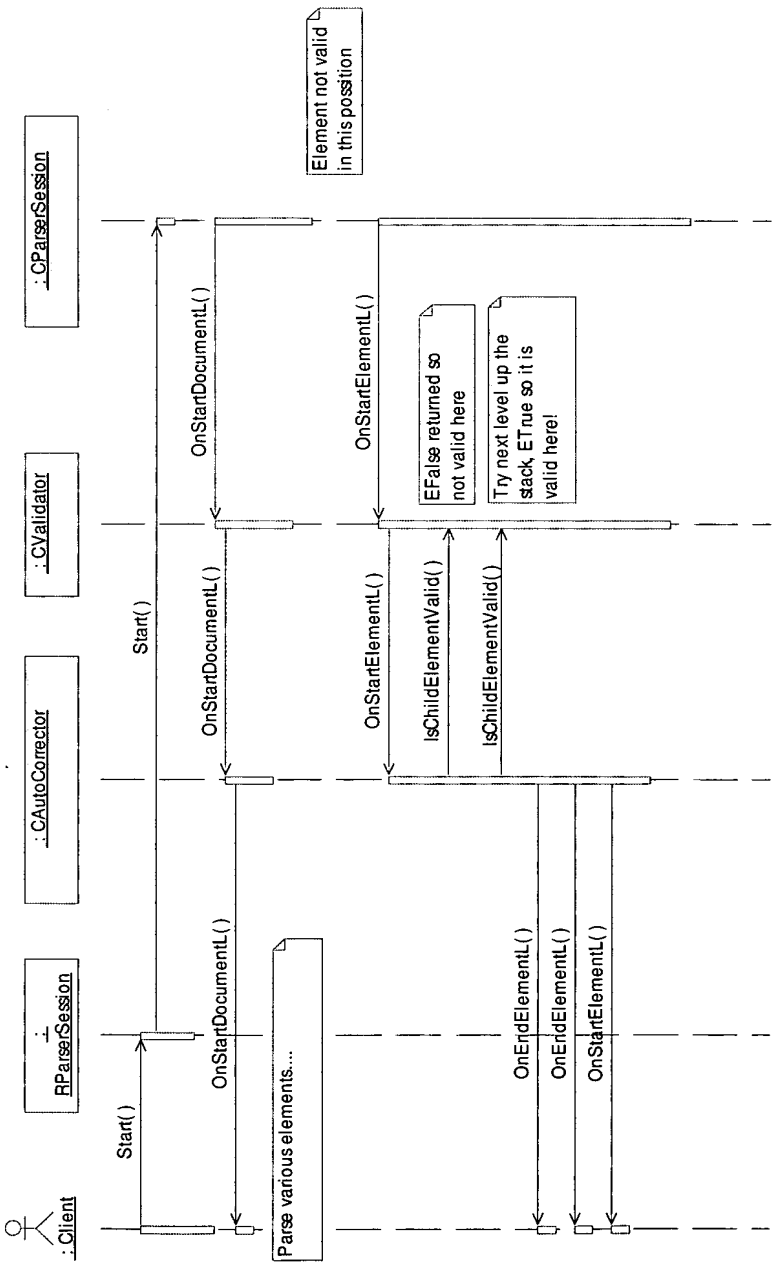
:Client
RParserSession
:CAutoCorrector
:CValidator
:CParserSession
Start()
Start()
OnStartDocumentL()
OnStartDocumentL()
OnStartDocumentL()
Parse various elements....
OnStartElementL()
IsChildElementValid()
IsChildElementValid()
OnStartElementL()
EFalse returned so not valid here
Try next level up the stack, ETrue so it is valid here!
Element not valid in this position
OnEndElementL()
OnEndElementL()
OnStartElementL()

Figure 7

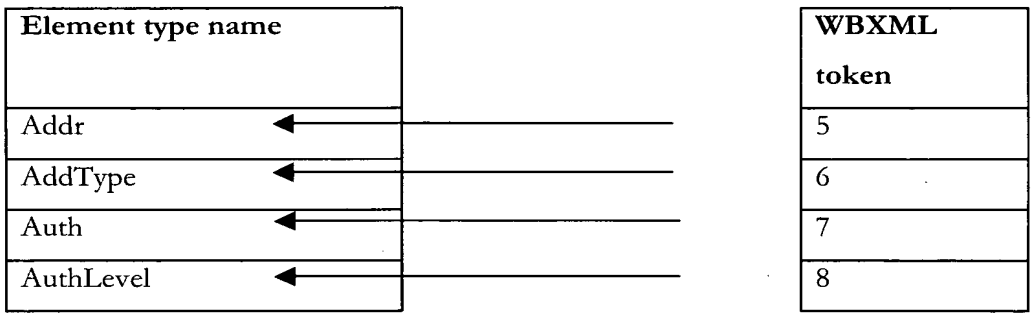
Element type name
Addr
AddType
Auth
AuthLevel
WBXML token
5
6
7
8

Figure 8